REVISION R6 · 15 OCT 2026 · APPROVED BY CLIENT

Stand 15288 · Sinor Marine / Amphicos
Equipment layout proposal

Four equipment items, a back-wall video wall and the agreed logos added to the approved Amphicos booth without changing its structure or size. R1 was approved on 15 Oct 2026 with the recommended option for every decision at the bottom; revisions R2 to R6 were approved by the client, Rahul, on the same day and are shown throughout this copy. The interactive 3D model follows this layout.

EVENT	ADIPEC 2026, ADNEC
STAND	15288 · 6 × 5 m · 30 m²
TYPE	Peninsula, 3 sides open
REAR	Shared wall, Stand 15285
UNITS	cm unless noted
REVISION	R6
DATE	15 Oct 2026


Revision history

all approved by the client, 15 Oct 2026

REV	DATE	CHANGE
R1	15 Oct 2026	Original proposal approved with the recommended picks for decisions D1–D7.
R2	15 Oct 2026	SMT logo moved from the counter front to the back wall, centred below the video wall. Fugro and Sonardyne logos added to the aisle-facing fronts of their display tables. Two back-wall screens replaced by an 8-module video wall on the same footprint. Partner Brands Showcase added to the Sinor Marine front-corner frame.
R3	15 Oct 2026	Fugro and Sonardyne logos removed from the rear header corners; they now appear only on the table fronts. Partner Brands Showcase revised.
R4	15 Oct 2026	Partner Brands Showcase finalised as a 2 × 2 grid: Sinor Marine Technologies and SMT UK on top, Guidance Marine and Xplisi Technologies below.
R5	15 Oct 2026	Hanging MT and NAVIS logo panels removed because they blocked the video wall. Both logos now sit on lit white fascias across the console front cabinets. Console power confirmed at 230 V, 10 A each.
R6	15 Oct 2026	From the client's marked-up plan. SMT logo below the video wall (item 5, L5) removed; SMT now appears only in the Partner Brands Showcase. NAVIS console moved from the rear-right corner to right of centre (centre 410 cm from the left, 192 cm from the rear), square to the front aisle with the screen facing visitors; it takes the place of the right seating group's rear chair, and that group moves a further 35 cm forward with two chairs. Sonardyne table on the right edge removed; Sonardyne, in its lockable cradle, joins Fugro on one left-edge table, now 150 × 50 × 95 cm (was 100 × 50 × 95). Right rear corner and right edge left empty. Item numbers unchanged; 5 and L5 are retired.

Proposed top view

plan · 1 grid = 50 cm · front aisle at bottom

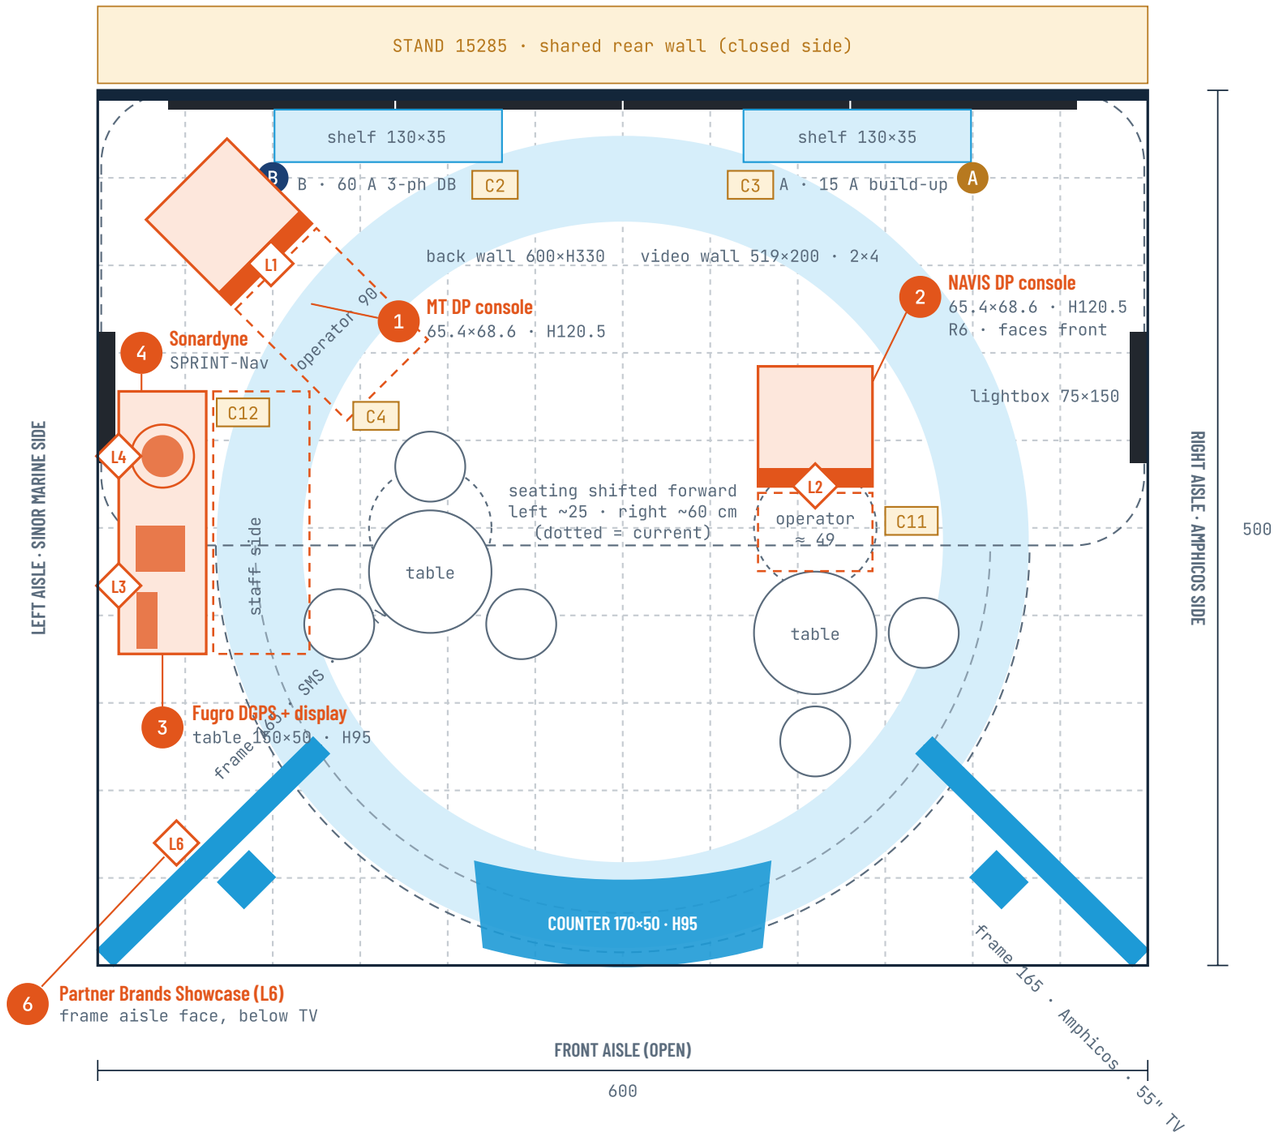


New equipment · Operator / staff clearance · New logo (L1–L4, L6; L5 removed R6) · Video wall (8 modules) · Existing frames, counter · Floor ring sticker · Header / canopy above · Conflict (see list)

Existing elements are drawn from the Amphicos booth drawings (scale 1:10). Seating positions and the lightbox column position are scaled from the renders and side views, so they are approximate. Logo markers sit on the face that carries the logo: L1 and L2 on the console front cabinets, L3 and L4 on the aisle-facing front of the shared left table, L6 on the left-aisle face of the Sinor Marine frame. L5 (SMT on the back wall) was removed in R6. The right rear corner and the right edge are empty from R6; power point A stays where it is.


Annotated elevations concept · heights above 10 cm platform

Front elevation (from front aisle)

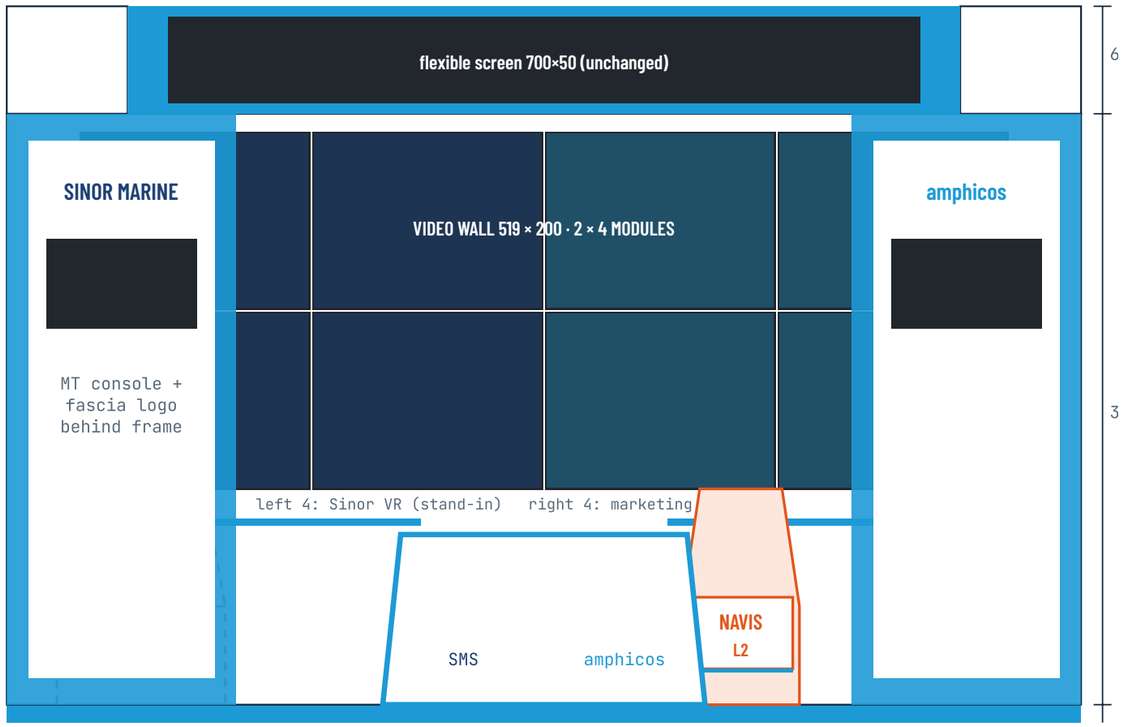

Straight on, the angled left frame hides the rear-left corner, so the MT console and its fascia logo are seen from the left aisle and on the diagonal from the front aisle. From R6 the NAVIS console (2) stands right of centre, 192 cm in front of the back wall, and faces the front aisle with its L2 fascia; the counter overlaps its left edge in this view. The rear header corners stay blank white. The video wall keeps the outer footprint of the two former screens, 120–320 cm above the platform. The SMT logo below the video wall was removed in R6. Seating is not shown.

Left elevation (from Sinor Marine side aisle)

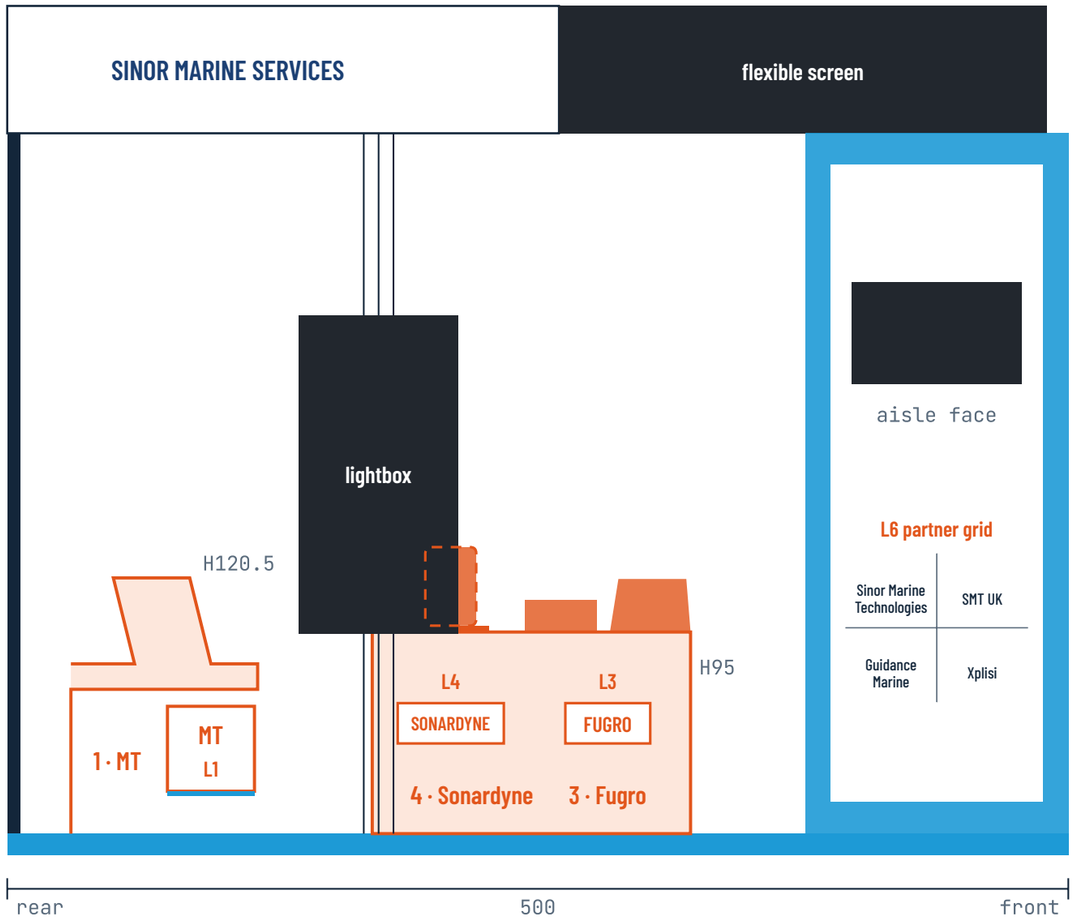

No logo is hung above the console: the MT logo is on a lit fascia across the front cabinet, 20–60 cm above the platform, and nothing rises above the console's own 120.5 cm. From R6 Sonardyne (4, logo 50 wide) and Fugro (3, logo 40 wide) share one 150 cm table, Sonardyne on the rear half and Fugro on the front half, both logos centred 52 cm above the platform. The lightbox column stands between the aisle and the rear end of the table, so the Sonardyne unit is partly behind the lightbox from this side (dashed, C12). The right edge is now empty: from the right aisle the NAVIS console (2) is seen side-on beyond the Amphicos frame, which carries no partner grid.

1 · The current booth `what the files show`

- **Size and type.** 6 m wide × 5 m deep, 30 m², peninsula. Front, left and right aisles are open; the rear adjoins Stand 15285. 10 cm raised platform with blue edge light. Overall height 400 cm.
- **Back wall.** 600 × 330 cm with two 250 × 200 cm screens and two 130 × 35 cm lit shelves below them. From R2 the two screens are replaced by an 8-module video wall on the same outer footprint (see the placement schedule).
- **Header.** A 600 × 260 cm rear header frame (60 cm fascia, open centre) carrying the Sinor Marine Services logo on the left side and the Amphicos logo on the right side. A semicircular canopy (Ø 465 cm, 230 cm deep) projects to the front with a 700 × 50 cm wrap-around flexible screen and a ceiling of downlights.
- **Front corners.** Two angled 165 × 330 cm frames with blue LED edges, double-sided: Sinor Marine on the left, Amphicos on the right, each with a 55" TV and a 50 × 35 cm laptop shelf on the aisle face.
- **Columns.** One triple-pole column with a 75 × 150 cm lightbox on each side, about 1.75 m from the rear.
- **Reception.** Curved 170 × 50 × 95 cm counter at front centre carrying the Sinor Marine and Amphicos logos, with lockable storage.
- **Seating.** Two round tables with three chairs each under the canopy, inside a Ø 465 cm blue floor ring. Two potted plants appear in the renders near the rear sides.
- **Design language.** White surfaces, Amphicos cyan, Sinor navy, blue LED edge lighting and lit acrylic logos.
- **Power.** B = 60 A three-phase main DB at rear left (1.0 m from the left side, 0.5 m from the rear). A = 15 A single-phase build-up power at rear right. All cabling runs under the platform.
- **Fixed vs movable.** Walls, header, canopy, frames, columns and screens are structural and stay. Tables, chairs, plants and the small side shelves can move.

2 · Requirements from the Sinor Marine document

#	ITEM	SIZE (FROM DOCUMENT)	PLACEMENT ASKED	LOGO ABOVE	DATA GAPS
1	MT DP console	`W 653.5 × D 685.9 × H 1,205 mm desk 767–797 · cabinet 676`	Floor-standing, Sinor Marine side, "marked location"	MT (on console fascia from R5, see L1)	Marked location not in any file. Power confirmed: 230 V, 10 A (≈ 2.3 kW).
2	NAVIS DP console	`Same as item 1`	Floor-standing, opposite side, "marked location"	NAVIS (on console fascia from R5, see L2)	Same enclosure as MT, NAVIS screen and joystick panel. Power confirmed: 230 V, 10 A (≈ 2.3 kW). Position from the client's marked-up plan (R6).
3	Fugro Seastar 9410-AUT DGPS + monitoring display	`not given`	Presentable display table, units side by side	Fugro (on table front from R2; shared left table from R6)	`assumption` unit sizes needed from datasheet. Power unknown.
4	Sonardyne SPRINT-Nav DP	`not given`	Presentable display table with secure holder	Sonardyne (on table front from R2; shared left table from R6)	`assumption` unit size and weight needed for holder. Power unknown.
5	SMT (Sinor Marine Technologies) logo	–	In the overall booth branding, with Sinor Marine and Amphicos	–	Placement left to us. Approved in R2: back wall, below the video wall. Removed in R6: SMT now appears only in the Partner Brands Showcase.

The document jumps from section 05 to 07. If a section 06 existed, it was not in the file. Added at the client's request after R1, and not in the document: the 8-module video wall (R2) and the Partner Brands Showcase (R2–R4).

3 · Placement schedule

#	POSITION	FOOTPRINT	CLEARANCE	EXISTING ELEMENTS AFFECTED	WHY HERE
1	Rear-left corner, turned 45° to face the booth centre. Centre about 75 cm from left, 75 cm from rear.	65.4 × 68.6 H 120.5	90 cm operator zone in front; cable gap behind	Left plant and small rear side shelf removed. Left seating moves ~25 cm forward.	On the Sinor Marine side under the SMS header, next to the main DB for a short feed, visible from the left aisle and diagonally from the front. Own 16 A socket from DB B assumption.
2	Right of centre, square to the front aisle with the screen facing visitors. Centre 410 cm from left, 192 cm from rear (308 from front), in place of the right seating group's rear chair. R6	65.4 × 68.6 H 120.5	≈ 49 cm to the right seating table in front (C11)	Right seating group loses its rear chair and moves a further 35 cm forward (~60 cm in all), two chairs. Right rear corner left empty.	Position from the client's marked-up plan. Screen reads straight on from the front aisle. Own 16 A socket from DB B, cable under the platform assumption.
3	Left edge, front half of one shared table (Sonardyne on the rear half), long side to the left aisle. Table centre 37 cm from left, 172–322 cm from rear. R6	150 × 50 H 95 assumption was 100 × 50	~55 cm staff side inside	None structural. The lightbox column stands in front of the rear end of the table from the left aisle (C12).	Faces the left aisle so visitors stand off-stand. Staff demo from inside. Both sensor units on one table on the Sinor Marine side.
4	Left edge, rear half of the shared table with item 3, unit in its lockable acrylic cradle. Moved from the right edge; the right table is removed. R6	shared table 150 × 50 · H 95	Shared with item 3	Right edge left empty.	From the client's marked-up plan. Groups the two sensor units in one display.
5	Removed in R6. Was: back wall, centred below the video wall (R2). SMT now appears only in the Partner Brands Showcase (6). R6	–	–	Back wall below the video wall left plain. Counter keeps two logos (Sinor Marine Services, Amphicos).	Client's marked-up plan.
6	Partner Brands Showcase on the left-aisle face of the Sinor Marine front-corner frame, below the TV. R2–R4	≈ 122 × 70 centre H 97 from 3D model	–	Graphic on the existing white frame panel. None structural.	Groups the SMT group and partner brands on the Sinor Marine side, facing the left aisle.
VW	Video wall on the back wall, 2 rows × 4 columns, centred, 120–320 cm above the platform. Left 4 modules Sinor VR platform content (stand-in images until screenshots arrive), right 4 marketing artwork. R2	519 × 200 overall module ≈ 129 × 99.5 bezel 1.2 · gap 1	–	Replaces the two 250 × 200 screens on the same outer footprint.	One continuous image across the back wall, seen from all three aisles.

LOGO	PROPOSED FIXING	SIZE	VISIBLE FROM
L1 MT	Lit white fascia across the MT console front cabinet, 20–60 cm above the platform, blue LED line along its bottom edge. Nothing rises above the console's 120.5 cm. R5 replaces the panel hung from the header.	`fascia ≈ 58 × 40` `logo 44 wide`	Left aisle, inside, front diagonal
L2 NAVIS	Same, on the NAVIS console front cabinet. R5 From R6 the console faces the front aisle.	`fascia ≈ 58 × 40` `logo 50 wide`	Front aisle, inside
L3 Fugro	On the aisle-facing front of the shared left table, centred on the front half, centre 52 cm above the platform. Removed from the rear header corner in R3. Shared table R6.	`40 wide`	Left aisle
L4 Sonardyne	Same table front, centred on the rear half, centre 52 cm above the platform. Moved from the right-edge table in R6. Removed from the rear header corner in R3.	`50 wide` `was 60`	Left aisle
L5 SMT	Removed in R6. Was lit acrylic on the back wall below the video wall (R2). SMT appears only in the Partner Brands Showcase (L6).	—	—
L6 Partner Brands Showcase	2 × 2 grid with hairline dividers on the left-aisle face of the Sinor Marine frame, below the TV. Top row: Sinor Marine Technologies, SMT UK. Bottom row: Guidance Marine, Xplisi Technologies. R2–R4	`≈ 122 × 70` `from 3D model`	Left aisle
Counter	Existing counter graphic: Sinor Marine Services and Amphicos only.	`unchanged`	Front aisle

4 · Conflicts and installation concerns

	ISSUE	PROPOSED RESOLUTION
C1	The requirements say the consoles go at "previously marked" locations, but none of the four files marks them.	Rear corners proposed. If you have the marked drawing, send it and I will match it. R6: NAVIS position taken from the client's marked-up plan; MT stays in the rear-left corner.
C2	DB B (60 A) sits 0.5 m from the rear, but the notes say supply points are concealed behind the back wall, which the drawings place on the rear boundary. It also lands right beside the MT console flank.	Keep B as a floor box under the platform with an access hatch beside the console, which also hides it. Or ask SM Advertise to move the point to the rear boundary.
C3	Point A is 15 A build-up power and is normally not live during the show. Point A stays where it is.	Feed all four items from DB B under the platform. From R6 Fugro and Sonardyne are both on the left side near DB B, and the NAVIS cable runs under the platform to its position right of centre (length to confirm). MT and NAVIS are confirmed at 230 V, 10 A each (≈ 2.3 kW each, 4.6 kW for the pair), each on its own 16 A socket from DB B; the 16 A socket rating is our assumption, to confirm with the electrician. Fugro and Sonardyne power ratings are still needed from the suppliers.
C4	The console operator zones reach the rear chairs of both seating groups. Seating is not dimensioned in the drawings.	Move both table groups ~25 cm toward the front. If that is too tight once furniture sizes are known, drop to two chairs per table. R6: the left group stays as recommended; the right group moves a further 35 cm forward with two chairs, and NAVIS takes its rear-chair position.
C5	From dead-straight in front, the angled frames hide the rear corners, so the MT console and its fascia logo are seen from the left aisle and front diagonal only.	Accepted to avoid moving structure. R6: NAVIS now sits right of centre facing the front aisle, so this applies to MT only.
C6	The small rear side shelves (≈ 104 cm high) and the two potted plants sit where the consoles go.	Remove the shelves. Plants can move beside the counter or be dropped. R6: the right rear corner is left empty.
C7	No dimensions for the Fugro receiver, its display, or the SPRINT-Nav. The holder and table cannot be sized yet.	Shared table drawn at 150 × 50 cm (R6, was 100 × 50) as a placeholder. Need datasheets to confirm both units fit.
C8	The electrical plan lists the exhibitor as First Marine and Engineering Services Limited, while the stand brands are Sinor Marine and Amphicos.	No layout impact. Flagging in case the organiser record needs correcting.
C9	The MT and NAVIS logo panels hung from the rear header (underside ≈ 240 cm) blocked the video wall.	Resolved in R5: panels removed; each logo is on a lit fascia across its console's front cabinet, below desk height.
C10	The 95 cm counter stands in front of the SMT back-wall logo (62–98 cm above the platform) on the centre line.	Closed in R6: the SMT back-wall logo is removed.
C11	R6: the NAVIS console front (≈ 274 cm from the front) is ≈ 49 cm from the edge of the moved right seating table (225 cm from the front), less than the 90 cm operator zone in front of MT.	Confirm the operator space with the client. If it is too tight, the right table can move toward the right edge, which is now empty.
C12	R6: the left lightbox column (≈ 137–212 cm from the rear, panel ≈ 94–244 cm above the platform) stands between the left aisle and the rear end of the shared table, partly screening the Sonardyne unit from that side. The Sonardyne logo below the lightbox stays clear.	Visible from the front diagonal and from inside (see 3D model). Check the sightline on site.

5 · Decisions for you

D1 · Console positions

Recommended: rear-left (MT) and rear-right (NAVIS) corners, as drawn.

Or send the marked drawing the requirements refer to.

> **Changed in R6.** From the client's marked-up plan, NAVIS moves to right of centre (centre 410 cm from the left, 192 cm from the rear) in place of the right seating group's rear chair. MT stays in the rear-left corner.

D2 · Console orientation

Recommended: turned 45° toward the booth centre, so the screens read from the side aisle and the front diagonal.

Alternative: square to the front aisle. Tidier lines, but the screens face the back of the frames.

> **Changed in R6 for NAVIS.** At its new position NAVIS is square to the front aisle with the screen facing visitors. MT stays at 45°.

D3 · Which side gets Fugro and Sonardyne

Recommended: Fugro with MT on the Sinor Marine side, Sonardyne with NAVIS on the Amphicos side.

Alternative: swap them. The document does not specify sides.

> **Superseded in R6.** Fugro and Sonardyne share one table on the left (Sinor Marine) edge: Sonardyne on the rear half, Fugro on the front half. The right edge is empty.

D4 · MT and NAVIS logo fixing

Recommended: lit acrylic panels hung from the header frame directly over each console.

Alternative: put them on the white header corners for front-aisle visibility. This moves Fugro and Sonardyne onto table-mounted risers instead.

> **Superseded in R5.** The hung panels blocked the video wall and were removed. Each logo is now on a lit white fascia (≈ 58 × 40 cm) across its console's front cabinet, 20–60 cm above the platform. Fugro and Sonardyne are on their table fronts (R2) and no longer on the header corners (R3); the header corners stay blank.

D5 · Display tables

Recommended: two 100 × 50 × 95 cm white plinth tables with blue LED edge to match the counter, with a lockable cradle for SPRINT-Nav.

Sizes change once the unit datasheets arrive.

> **Superseded in R6.** One 150 × 50 × 95 cm table on the left edge carries both units, Sonardyne in its lockable acrylic cradle. The right-edge table is removed.

D6 · SMT logo

Recommended: counter front, centred between Sinor Marine and Amphicos.

Alternative: beside the SMS logo on the left side of the header.

> **Superseded in R2.** The SMT logo is on the back wall, centred below the video wall (≈ 90 × 36 cm, centre 80 cm). The counter keeps only the Sinor Marine Services and Amphicos logos. SMT also appears in the Partner Brands Showcase.

> **Superseded in R6.** The back-wall SMT logo is removed. SMT appears only in the Partner Brands Showcase.

D7 · Seating

Recommended: keep both tables, shift ~25 cm forward, three chairs each.


Fallback: two chairs per table.

> **Changed in R6.** Left group as recommended. The right group moves a further 35 cm forward (~60 cm in all) with two chairs, outer side and front; its rear chair gives way to NAVIS.


Assumptions to confirm

- Left as seen from the front aisle is the Sinor Marine side. The renders show the SMS header and frame on that side.
- Seating, plant and lightbox column positions are scaled from renders and side views, not from dimensioned drawings.
- All heights are measured from the top of the 10 cm platform.
- Logo sizes are proposals sized to fit the surfaces. Final artwork should come from the logo files in the requirements document. Partner Brands Showcase overall size is taken from the 3D model.
- MT and NAVIS console power is confirmed at 230 V, 10 A each. The 16 A socket per console is our assumption, to confirm with the electrician.
- Fugro and Sonardyne power ratings and unit dimensions are unknown until datasheets are supplied.
- The left four video wall modules show stand-in images until the Sinor VR platform screenshots arrive.

3D views R6 model renders · for reference, the drawings govern

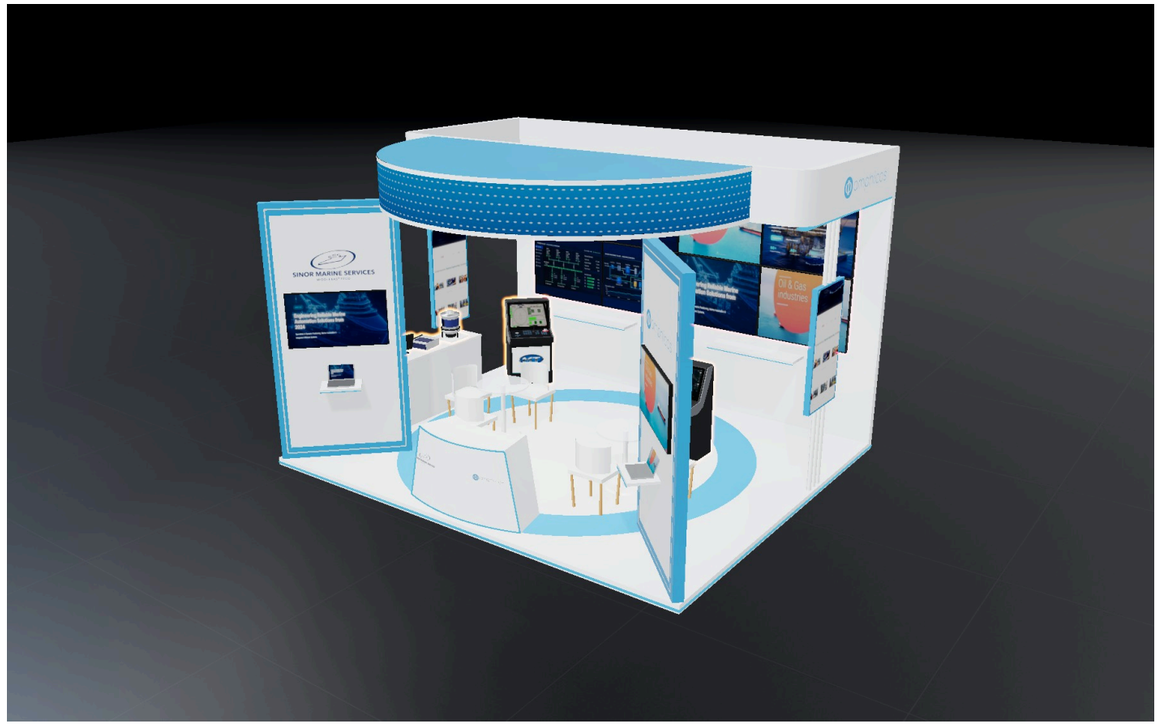

Front-right view. Video wall on the back wall, MT console in the rear-left corner, Sonardyne and Fugro on the shared left table; the NAVIS console stands right of centre behind the Amphicos frame.

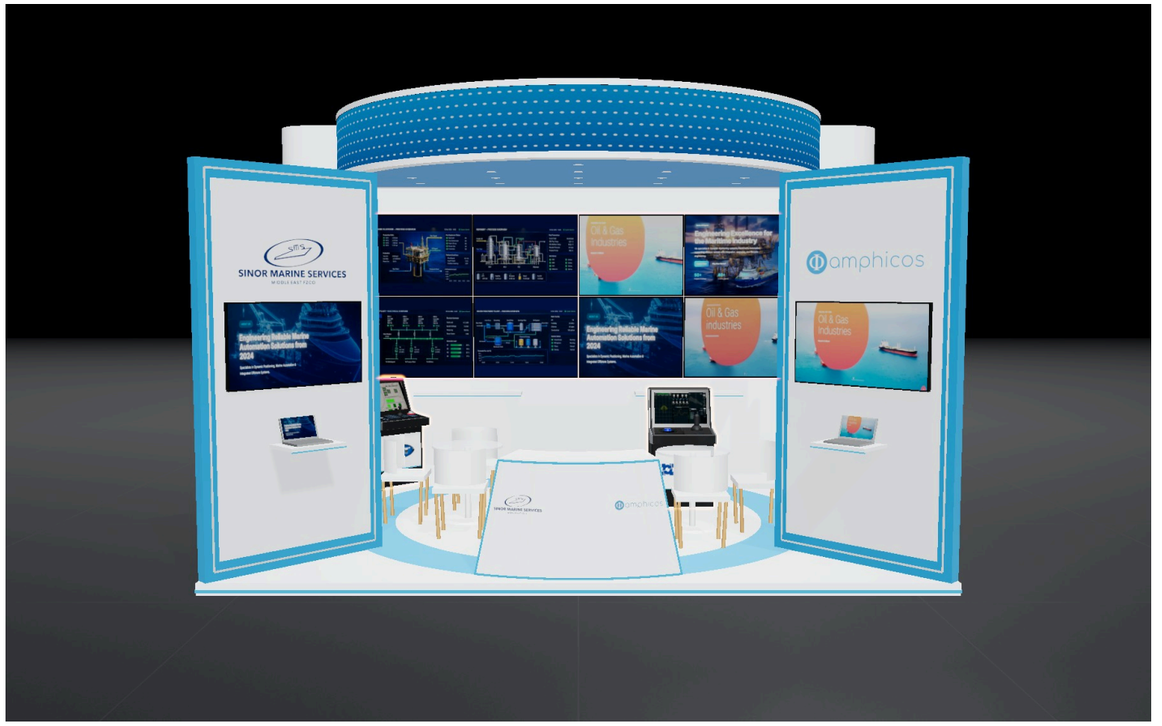

Front view. NAVIS console right of centre facing the front aisle; nothing below the video wall since the SMT logo was removed; counter with Sinor Marine Services and Amphicos logos only.